



ZIMBABWE SCHOOL EXAMINATIONS COUNCIL
General Certificate of Education Advanced Level

BUILDING TECHNOLOGY & DESIGN
PAPER 3 Practical Test

6003/3
5 hours

SPECIMEN PAPER

Additional materials:

Plain paper,
Dimension paper,
Scientific calculator,
Graph paper,
Booking form,
Answer Booklet.

Time: **5 hours**

INSTRUCTIONS TO CANDIDATES

Answer the question on the answer paper provided.

Answer part **(b)(i)** of the question on the booking form attached.

This question paper consists of 4 printed pages and 2 Inserts.

Copyright: Zimbabwe School Examinations Council, Specimen Paper.

- 1 (a) A piggery unit measuring **10 m** by **5 m** is to be built within a maximum period of 30 days.
- (i) Outline **ten** stages that are involved in constructing the piggery unit. [10]
 - (ii) Produce a **Gantt chart** of the construction processes for the piggery unit, assuming that each activity takes a maximum of 3 days. [20]
 - (iii) Suggest any **three** trade persons who can take part in the construction of the piggery unit. [3]
- (b) **Figure 1** shows readings taken during a site survey field work, with the stations placed at the centre of the targets.

NOTE: The distance between points are as follows

AB = 25m
BC = 30m
CD = 20m

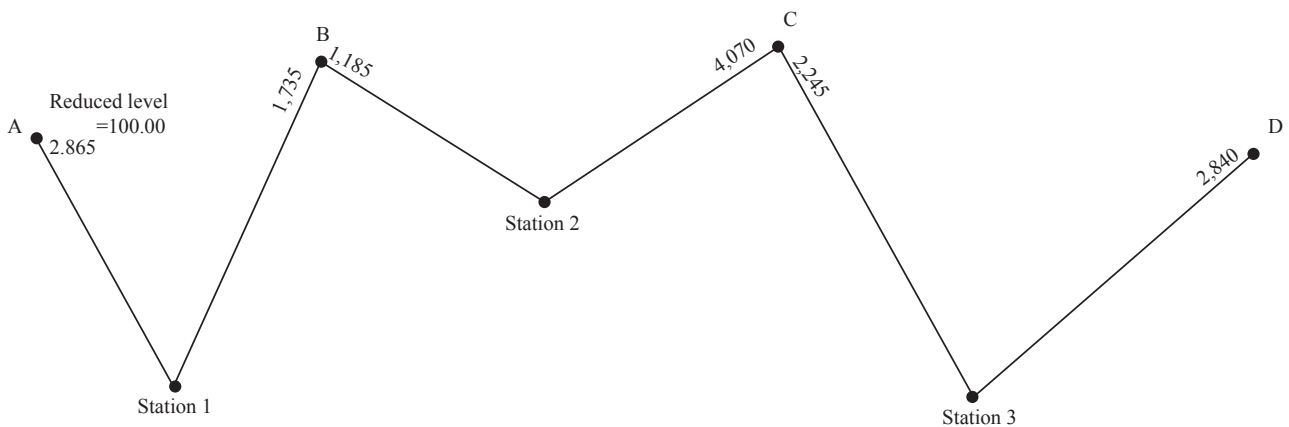


Fig. 1

- (i) Copy and complete the attached booking form using the rise and fall method and carry out the arithmetic check. [25]
- (ii) Plot a graph of the terrain (gradient) of the field work. [8]

- (c) **Figure 2** shows a section through a **one** brick wall superstructure for an office block to be built.

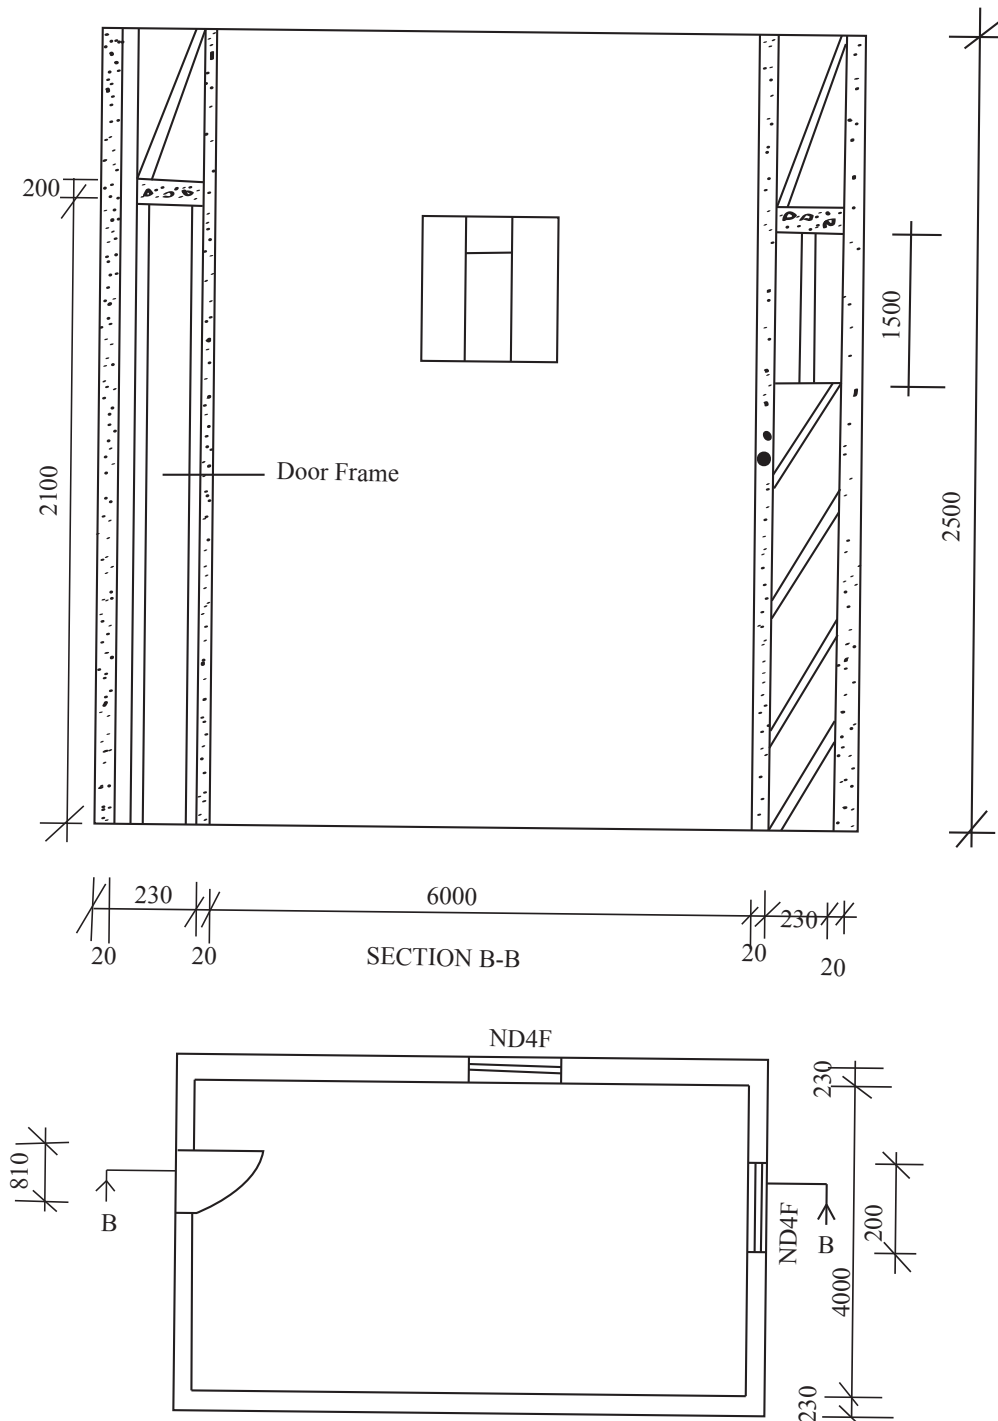


Fig. 2

Perform the taking off for the following selected areas:

- (i) damp proof course,

[4]

- (ii) brickwork, [7]
 - (iii) concrete in ring beam, [3]
 - (iv) internal plastering and [8]
 - (v) external plastering [8]
- Note:** Timesing. [4]